

FEATURES

- **Simple to use and economical to operate**
- **Automatic dv/dt charge termination**
- **Equalize capability**
- **Ferroresonant Transformers**
- **Designed for single shift light duty**
- **Battery powered equipment**
 - Walkies
 - Forklifts
 - Sweepers
 - Scrubbers
 - Scissorlifts

**INDUSTRIAL BATTERY CHARGER****SINGLE SHIFT SERVICE****APPLICATION**

Designed for single shift light duty with available recharge times greater than 8 hours.

SIMPLICITY

- Auto start/stop
- Starts automatically after connecting charger to battery. No timers to set.
- Charger automatically stops after battery receives proper charge.

RELIABILITY

- Failsafe protection
- Internal backup timer terminates charge cycle in the event of abnormal conditions
- AC interrupt protection. Charger automatically restarts upon resumption of AC power

TECHNOLOGY

Ferroresonant charger that automatically adjusts output current in proportion to battery voltage. Your batteries receive the correct amount of charge for optimum performance and maximum battery life.

MODELS


NUMBER OF CELLS	AMP HOUR RANGE	MAC MODEL NUMBER	DC VOLTS	DC AMPS	AC VOLTS	AC INPUT	SHIPPING LBS	SHIPPING KG
6	180-380	PAC630	12	30	120	5.4	45	20
6	255-450	PAC640	12	40	120	7.2	47	21
6	300-600	PAC650	12	50	120	9.0	57	26
6	360-720	PAC660	12	60	120	10.8	64	29
6	450-900	PAC675	12	70	120	13.5	72	33
12	180-380	PAC1230	24	30	120	10.8	51	23
12	255-450	PAC1240	24	40	120	14.4	64	29
12	300-600	PAC1250	24	50	120	18.0	69	31
12	360-720	PAC1260	24	60	208/240	12.5/10.8	83	38
18	180-380	PAC1830	36	30	120	16.2	69	31
18	255-450	PAC1840	36	40	120	21.6	69	31
18	300-600	PAC1850	36	50	208/240	15.6/13.5	95	43
18	360-720	PAC1860	36	60	208/240	18.7/15.2	104	47
24	150-300	PAC2425	48	25	120	18.0	69	31
24	255-450	PAC2440	48	40	240	14.4	95	43

MECHANICAL

	IN	CM
H	19	48
W	12	31
D	13.5	34

ELECTRICAL

INPUT
 120 Volt
 208/240 Volt
 1 Phase
 60 HZ

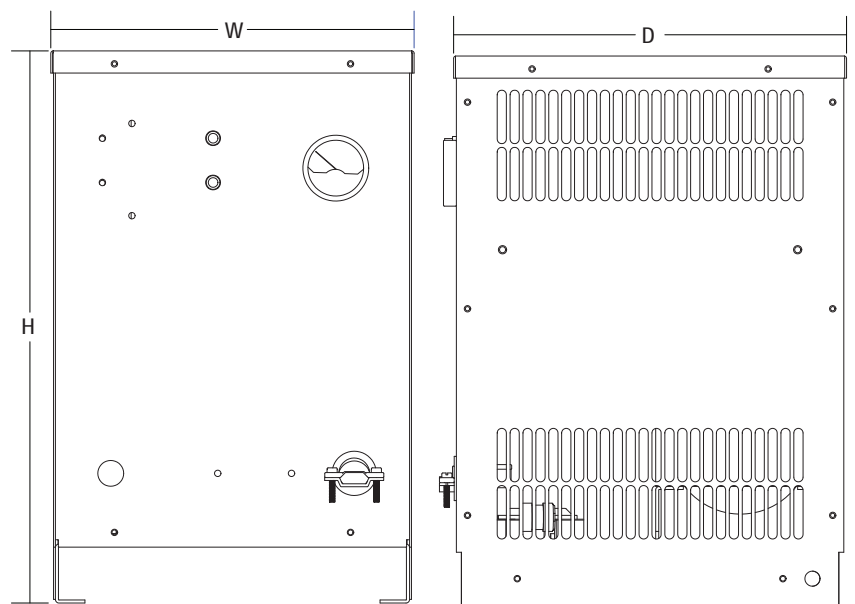

ORDERING INFORMATION

1. Specify Model number
2. Specify AC voltage
3. Specify DC connector option