

MODELS


NUMBER OF CELLS	AMP HOUR RANGE	MAC MODEL NUMBER	DC VOLTS	DC AMPS	AC VOLTS	AC INPUT	SHIPPING LBS	SHIPPING KG
6	180-380	PAC630	12	30	120	5.4	45	20
6	255-450	PAC640	12	40	120	7.2	47	21
6	300-600	PAC650	12	50	120	9.0	57	26
6	360-720	PAC660	12	60	120	10.8	64	29
6	450-900	PAC675	12	70	120	13.5	72	33
12	180-380	PAC1230	24	30	120	10.8	51	23
12	255-450	PAC1240	24	40	120	14.4	64	29
12	300-600	PAC1250	24	50	120	18.0	69	31
12	360-720	PAC1260	24	60	208/240	12.5/10.8	83	38
18	180-380	PAC1830	36	30	120	16.2	69	31
18	255-450	PAC1840	36	40	120	21.6	69	31
18	300-600	PAC1850	36	50	208/240	15.6/13.5	95	43
18	360-720	PAC1860	36	60	208/240	18.7/15.2	104	47
24	150-300	PAC2425	48	25	120	18.0	69	31
24	255-450	PAC2440	48	40	240	14.4	95	43

MECHANICAL

	IN	CM
H	19	48
W	12	31
D	13.5	34

ELECTRICAL

INPUT
120 Volt
208/240 Volt
1 Phase
60 HZ

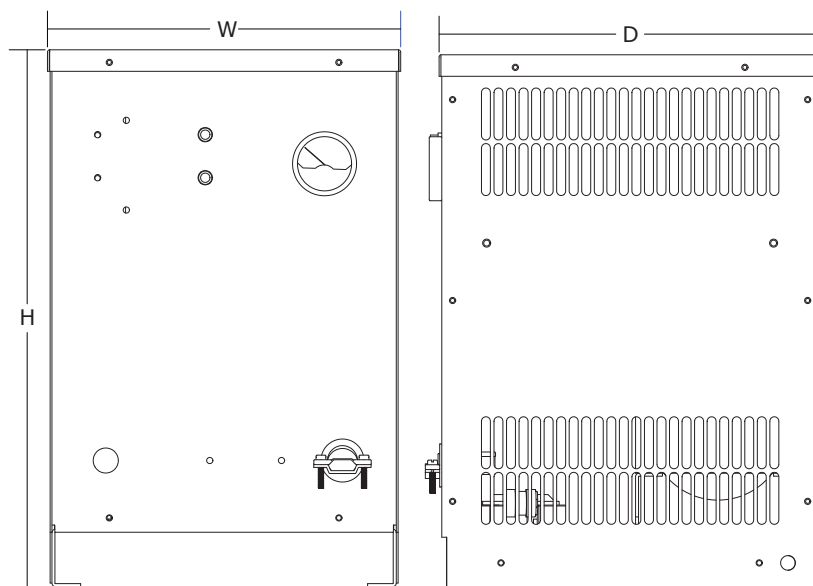

ORDERING INFORMATION

1. Specify Model number
2. Specify AC voltage
3. Specify DC connector option